查询HER102供应商

Micro Commercial Components
21201 Itasca Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

HER101 THRU HER108

1.0 Amp High Efficient Rectifiers 50 to 1000 Volts

Features

- High Surge Current Capability
- High Reliability
- Low Forward Voltage Drop
- High Current Capability

Maximum Ratings

Operating Temperature: -55°C to +125°C
Storage Temperature: -55°C to +150°C
For capcitive load, derate current by 20%

MCC Catalog Number	Device Marking	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
HER101	---	50V	35V	50V
HER102	---	100V	70V	100V
HER103	---	200V	140V	200V
HER104	---	300V	210V	300V
HER105	---	400V	280V	400V
HER106	---	600V	420V	600V
HER107	---	800V	560V	800V
HER108	---	1000V	700V	1000V

Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	$I_{F(AV)}$	1.0 A	T_A = 55°C
Peak Forward Surge Current	I_{FSM}	30A	8.3ms, half sine
Maximum Instantaneous Forward Voltage HER101-104 HER105 HER106-108	V_F	 1.0V 1.3V 1.7V	 I_{FM} = 1.0A; T_A = 25°C
Reverse Current At Rated DC Blocking Voltage (Maximum DC)	I_R	5.0 A 100 A	T_A = 25°C T_A = 100°C
Maximum Reverse Recovery Time HER101-105 HER106-108	T_{rr}	 50ns 75ns	 I_F=0.5A, I_R=1.0A, I_{rr}=0.25A
Typical Junction Capacitance HER101-105 HER106-108	C_J	 20pF 15pF	 Measured at 1.0MHz, V_R=4.0V

Notes: 1. 300 us Pulse Width, 1% Duty Cycle.

DO-41

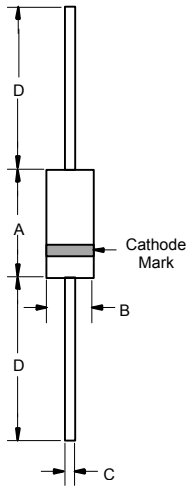

DIMENSIONS					
	INCHES		MM		
DIM	MIN	MAX	MIN	MAX	NOTE
A	.166	..205	4.2	5.2	
B	.08	.107	2.0	2.7	
C	.028	.034	.71	.86	
D	1.000	---	25.40	---	

HER101 THRU HER108

RATINGS AND CHARACTERISTIC CURVES

FIG.1- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

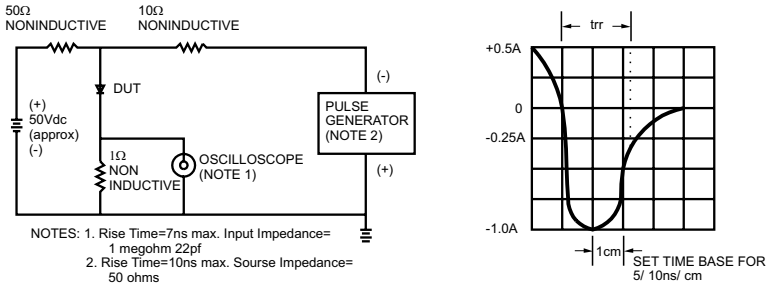

NOTES: 1. Rise Time=7ns max. Input Impedance= 1 megohm 22pf
2. Rise Time=10ns max. Sourse Impedance= 50 ohms

FIG.2- MAXIMUM AVERAGE FORWARD CURRENT DERATING



FIG.3- TYPICAL REVERSE CHARACTERISTICS

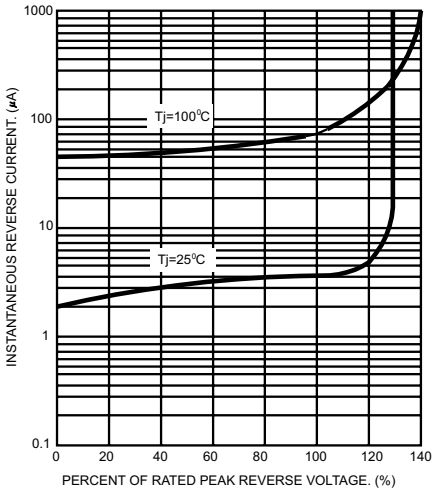

FIG.4- TYPICAL FORWARD CHARACTERISTICS

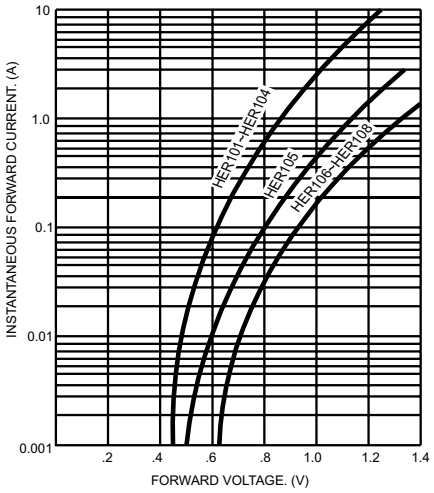

FIG.5- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

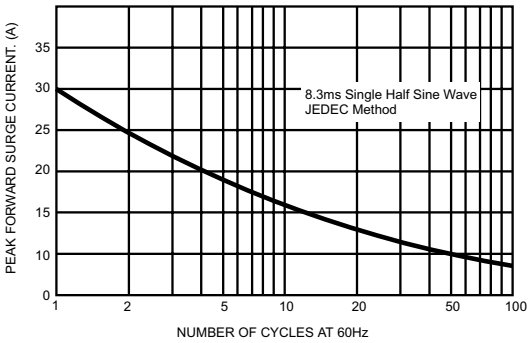

FIG.6- TYPICAL JUNCTION CAPACITANCE